

# PayTablet

M8

All-in-one PayTablet




## Elegant Design

Aluminum body with the perfect shape and sleek design with a wide-enough screen. Dual-camera delivers high-quality photographing and catalogues inventory in addition to accepting payments via QR code.

10 mm

## Powerful Smart Tablet

M8 is the first-ever Android tablet fully integrated with a secure payment engine designed. Octa-core high-performance processor with 3GB RAM+32GBROM memory, escort smooth and high-speed operation.

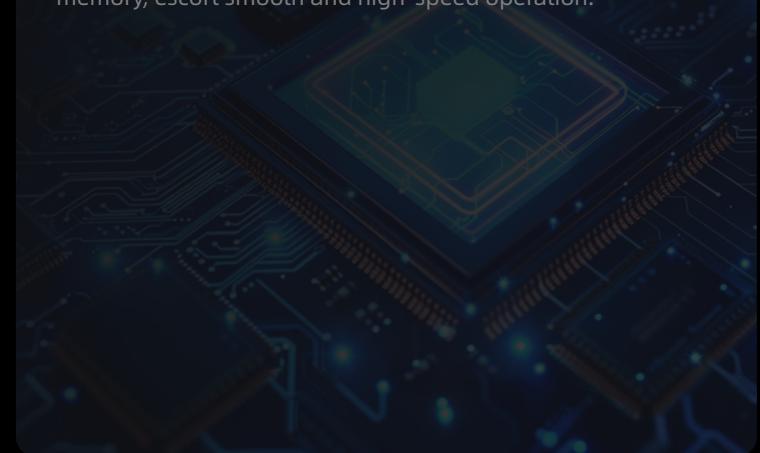

## Always Get Connected

4G Cellular data and high-speed Wi-Fi® on M8 gives you the flexibility to stay connected wherever you're. Host a video call or join a video conference from anywhere. Advanced cameras and the microphone keep faces and voice crystal clear.



# Specifications

Model Name: M8



## Operating System

Android™11, GMS Certified with Supporting UNIPHIZ UI



## Displays

Main Screen: 8 " 800 × 1280 px, IPS LCD, 500nits, Multi-Touch, Anti-Fingerprint coating, Mohs 6  
Secondary Screen: 1.54" 240 × 240 px, IPS LCD, Touch Screen



## Processor

MTK Octa-Core Cortex® - A53 2.0GHz + Cortex® - M3 96MHz



## Memory

LPDDR4X 3GB + eMMC 32GB

Optional:

LPDDR4X 4GB + eMMC 64GB

External:

microSD Card slot (Up to 256GB)



## Cameras

Front Camera: 5MP Fix Focus  
Rear Dual-Camera: 8MP Auto, Focus + 0.3MP Macro Lens



## Comms Configurations

4G / 3G / GPRS  
Wi-Fi® 2.4GHz / 5GHz, Bluetooth® 5.0



## Positioning

AGPS | GPS | GLONASS | Galileo | BEIDOU



## Sensors

Proximity Sensor | Light Sensor | G-Sensor | E-Compass | Vibration Motor | Flashlight



## Audio

Audio Speaker  
Dual Microphone



## Battery

Li-ion Polymer  
3.85V / 6300mAh



## SIM/SAM

2 SIM or 1 SIM + 1 SD  
Optional: eSIM



## Ports

1\* Type-C | 1\*Pogo Pin (6-Pin) |  
Audio Jack



## Power Supply

Input: 100 - 240V AC, 0.5A  
Output: 9V DC, 2.0A



## Buttons

Power Button  
2\*Volume Buttons



## Physical

210 × 123 × 10.28mm  
483g (Including battery)



## Environmental

Operating Temperature: -10°C ~ 45°C (14°F ~ 113°F)  
Storage Temperature: -20°C ~ 70°C (-4°F ~ 158°F)  
Relative Humidity: 10% ~ 93%, non-condensing



## Accessories(opt)

Protective Case with MSR Module |  
Tempered Glass or Anti-bacteria  
Screen Protector



## Certification

PCI 6.x | EMV L1 | EMV CL L1 | EMV L2 | qUICS L2 | payWave L2  
PayPass L2 | MasterCard TQM | AMEX Expresspay L2 |  
Discover D-PAS L2 | J/Speedy L2 | ABECS | PURE |  
Interac Flash L2 | RuPay | CE | UKCA | FCC | IC | UL |  
PTCRB | BQB | RoHS | GMS